

Job Number: 20/0192
Record No.: CC-0003**CHANGE IN CONTRACT****Harris County Flood Control District**

Contractor:	SpawGlass Civil Construction, Inc.	Date:	8/30/2021			
Address:	13800 West Road	PO Number:	P0000001428			
	Houston, TX	PS Fund:				
	77041-1114	PS Activity:				
Project Name:	Hunting Bayou Federal Flood Risk Management Project Discrete Segment 105, Hunting Bayou Channel Improvement from US 59 to Homest					
Project ID:	H100-00-00-E005					
<i>Contractor: In connection with your contract dated 9/15/2020, for construction of the above mentioned job, the work or material outlined below was not comprehended in the original contract, or the following deduction is desired. When this order has been properly filled in, and approved, please proceed to do this work in accordance with the alterations set out below:</i>						
Description of Change Desired						
<p>The purpose of this Contract Change is to adjust planned and projected quantities needed for current scopes of work. The adjustment accounts for changes in scope due to unforeseen field conditions, design directed plan revisions, and contract quantity adjustments due to quantity overruns. The following adjustments were identified during construction and have been coordinated/ concurred with the HCFCD Design Department.</p> <p>The unforeseen field condition items include the following: Filling voids with CSS, Remove and Dispose buried concrete rubble and asphalt pavement. The design directed plan revision items includes the following: Removal of sandy soil material that encountered along channel slopes and shelves from STA 625+00 to STA 677+00 and Installation of 3in x 5in granular fill.</p> <p>The quantity extensions for contract overages includes the following items: Construction fence to enhance the public safety from STA 674+00 to STA 680+00 RT. The contract duration extension includes 20 calendar days for additional work and 32 calendar days for approved inclement weather days through July 15, 2021.</p> <p>This Change in contract results in a net increase of \$0 to the Contract PO amount and 52 additional calendar days to the project duration.</p>						
Estimate of Cost						
Change Type	Pay Item ID	Pay Item Name	Unit	Quantity	Unit Price	Amount
Decrease						
	02315-02	EXCAVATION & OFF-SITE DISPOSAL	CY	-10,144.24	13.49	-136,845.76
	02511-43	WATER MAIN, PVC, AWWA C905, 16-INCH IN STEEL CASING	LF	-250.00	51.83	-12,957.50
	02751-03	CONCRETE PAVEMENT, 7 THICKNESS	SY	-413.00	64.96	-26,828.48
	02120-01	REMOVE & DISPOSE OF ROADWAY PAVEMENT AND SUBGRADE	SY	-400.00	2.92	-1,168.00
	02120-04	REMOVE & DISPOSE OF ALL PIPE	LF	-125.00	19.30	-2,412.50
	02120-18	REMOVE AND DISPOSE OF EXISTING BRIDGES, INCLUDING RAILING, BENTS, ABUTMENTS, WINGWALLS, PILING AND APPROACH SLABS	LS	-1.00	4,081.59	-4,081.59
	02315-03	EXCAVATION & FILL (ON-SITE MATERIAL)	CY	-1,714.00	3.36	-5,759.04
	02505-04	36-INCH HIGH DENSITY POLYETHYLENE (HDPE) SOLID AND PROFILE WALL PIPE	LF	-81.00	112.89	-9,144.09
	02513-02	8-INCH WET CONNECTIONS	EA	-2.00	3,114.44	-6,228.88
	02520-01	FIRE HYDRANT WITH 6-INCH FIRE HYDRANT LEAD	EA	-1.00	5,132.74	-5,132.74
	02521-03	8-INCH GATE VALVE WITH BOX	EA	-2.00	1,058.21	-2,116.42
	02630-01	TYPE C MANHOLE, FOR 42 AND SMALLER	EA	-2.00	4,282.00	-8,564.00
	02771-02	CONCRETE CURB	LF	-300.00	5.07	-1,521.00


Increase					
				Subtotal	-222,760.00
	01562-01	CONSTRUCTION FENCE	LF	3,500.00	3.95 13,825.00
	02120-03	REMOVE & DISPOSE OF CONCRETE RUBBLE AND CONCRETE STRUCTURES	CY	1,000.00	10.42 10,420.00
	02120-46	REMOVE & DISPOSE OF ASPHALT PAVEMENT	SY	1,500.00	3.50 5,250.00
	02378-06	GRANULAR FILL, 3-5 INCHES	TON	3,500.00	50.60 177,100.00
Addition				Subtotal	206,595.00
	02321-02	CEMENT STABILIZED SAND, 200 PSI, AS DIRECTED BY THE ENGINEER	TON	200.00	65.83 13,166.00
	02520-05	SALVAGE EXISTING FIRE HYDRANT (TO CITY OF HOUSTON)	EA	5.00	599.80 2,999.00
				Subtotal	16,165.00
		Changes in Calendar days: 52			

If applicable, the Auditor's certification is made when the purchase order is amended in the system.

TOTAL ADDED TO CONTRACT: 222,760.00


TOTAL DEDUCTED FROM CONTRACT: -222,760.00

NET CHANGE: 0.00

Approved:  D24EC247430E48F...


Print Name: **Nazeer Ahmed**
Project Manager

Basis and Work Agreeable to Us.

Approved:  2E985FDADEC4476...

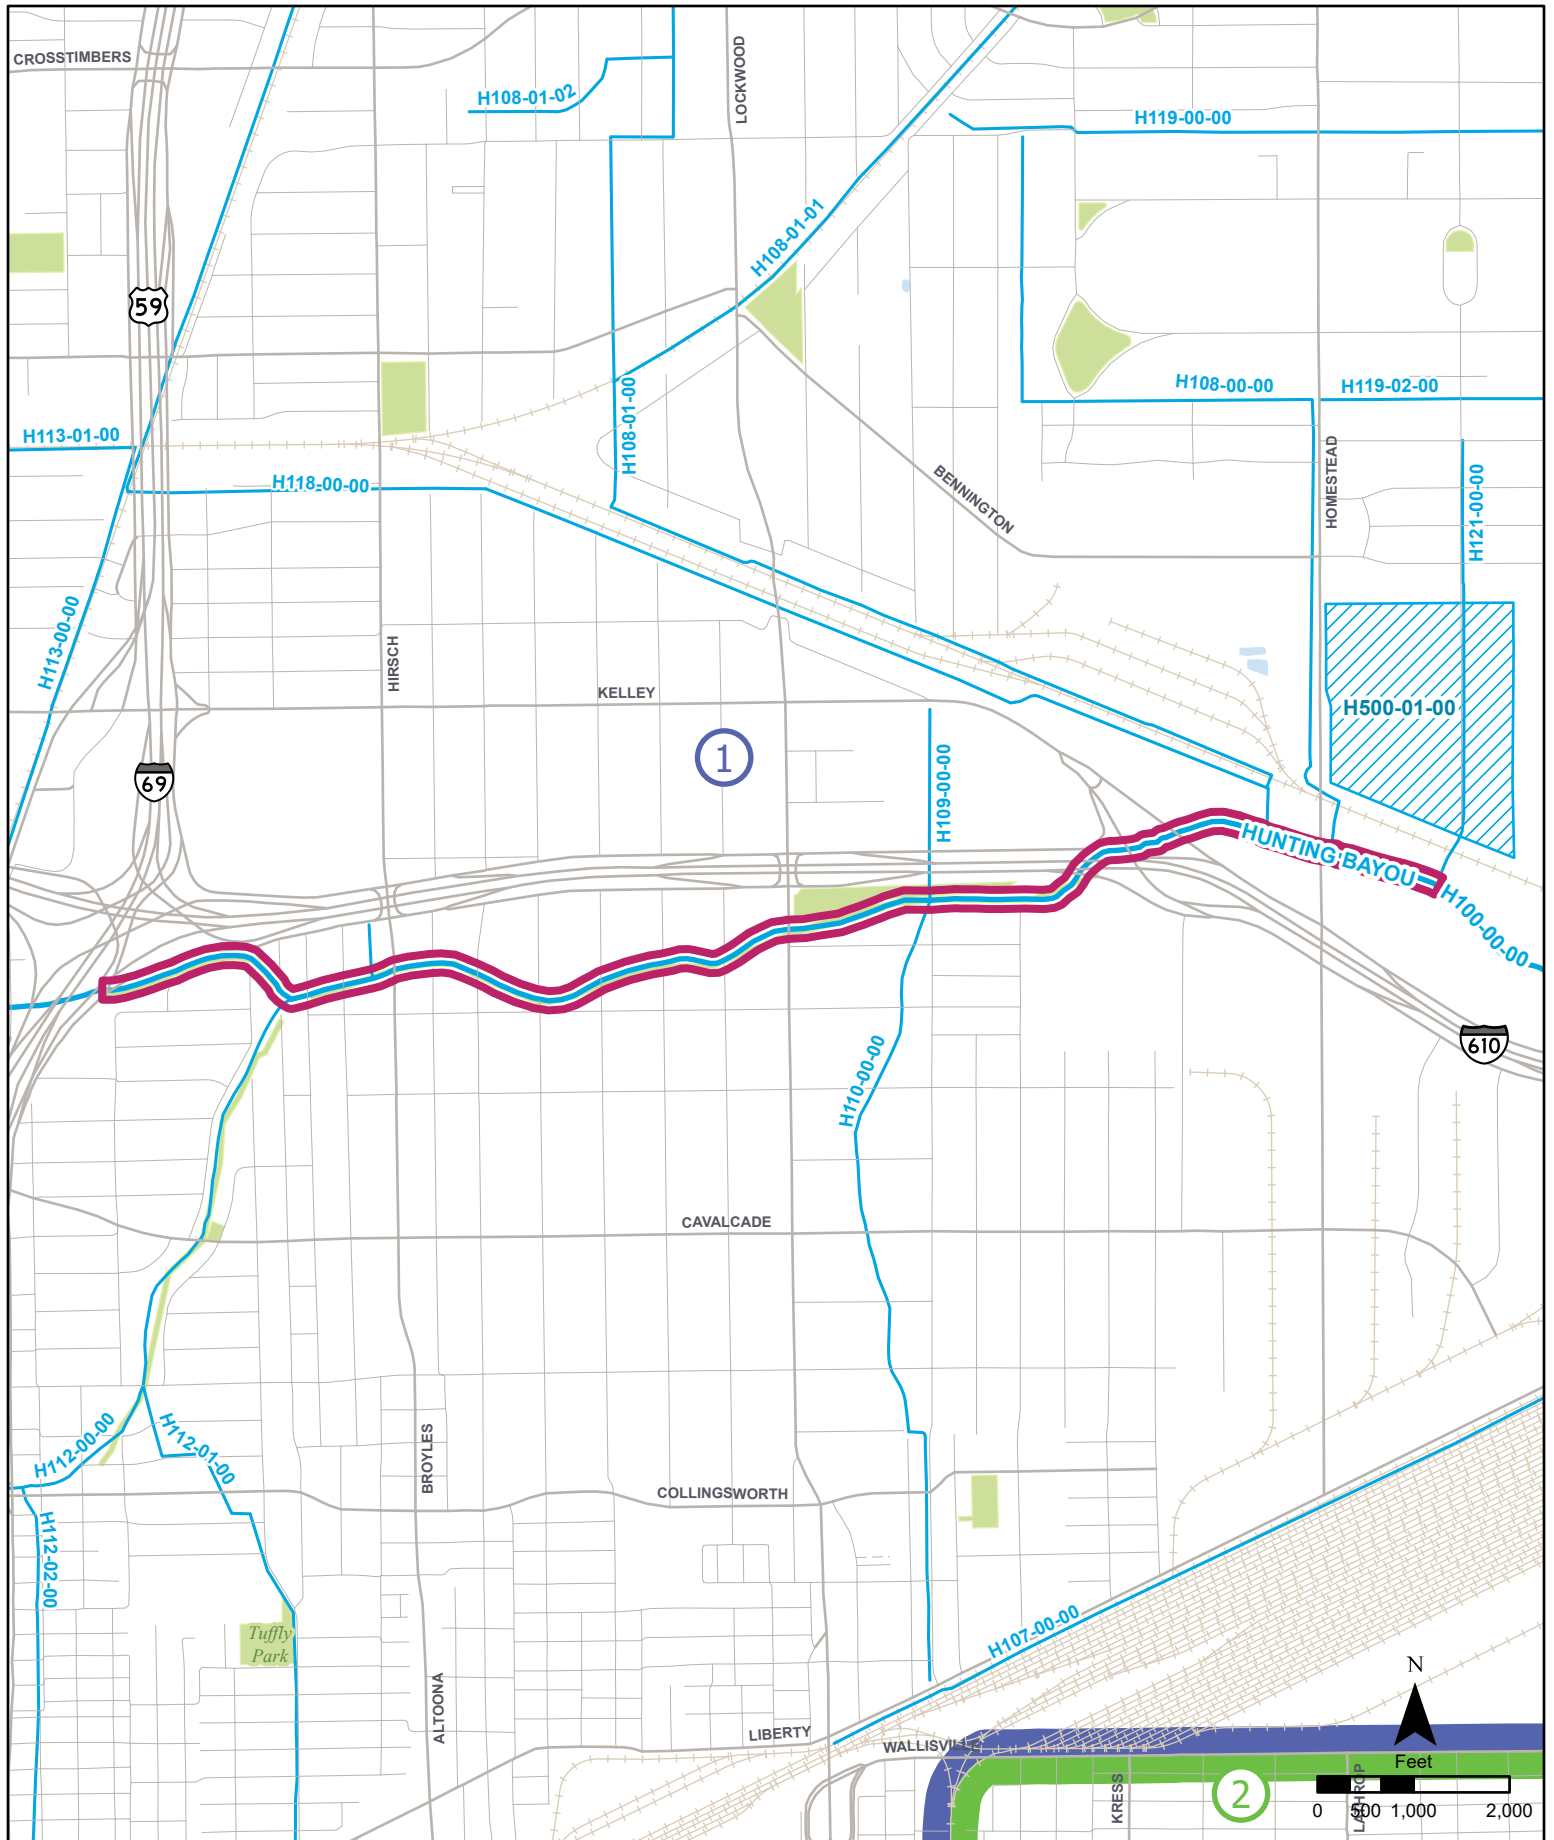
Print Name: **Alan Black**
HCFCF, Executive Director

Contractor: SpawGlass Civil Construction, Inc.

Signed:  F7F8DEE2B8AE48D...
For the Contractor

Print Name: **Weston Voss**

Authorized in Minutes Of: _____



Project ID: H100-00-00-E005

Watershed: Hunting Bayou
Precinct: 1

